
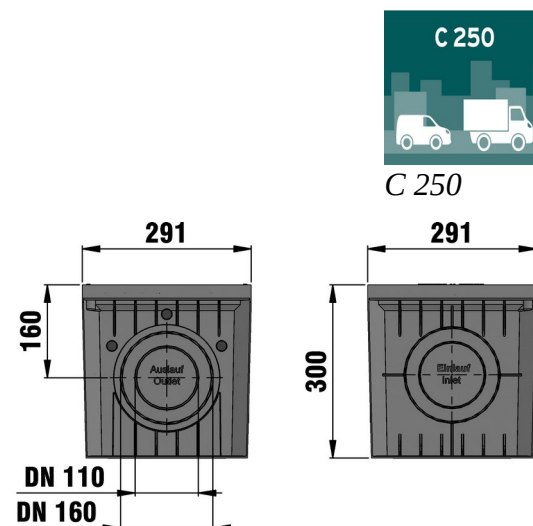


RECYFIX®POINT 30/30

RECYFIX®POINT 30/30, Point drainage, class C 250, Installation height 300 mm, with longitudinal ductile iron grating, bar distance 8 mm, screwed, black, KTL-coated, class C 250

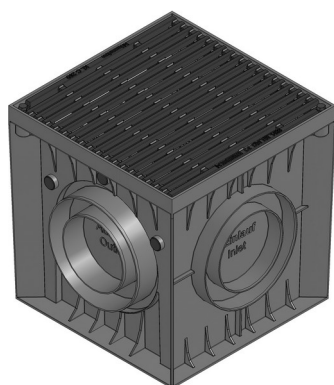

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Item-no.
291	291	300	6.893	989.0	32612

■ Product description:

RECYFIX POINT 30/30 - Gully, installation height 300 mm, made of recycled polypropylene, with longitudinal ductile iron grating made of spheroidal ductile iron EN-GJS-500-7, bar distance 8 mm, KTL-coated, locked, with silt bucket made of composite and foul air trap, with lateral connection possibility DN/OD 110/160, load class A 15 - C 250 according to EN 1433, CE compliant, LxWxH 291x291x300 mm, item no. 32612

■ Material:

- **Channel body:** recycled, modified Polypropylene
- **Grating:** Ductile iron GJS 500-7 with KTL-coating

■ Application areas:

- Industrial yards and commercial halls
- Parks and gardens

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!