

Brass Draincock



group: 833 **category:** valves **product line:** Pegler Draincock

The Prestex 833 is a brass draincock with male tapered thread. By using Prestex in your piping system you can install in easy to use heat free system. Prestex provides a piping suitable for domestic and light commercial applications.

- No need for use of naked flames
- Can be used on wet pipework
- Joints can be dismantled without adversely affecting performance
- Provided with all relevant approvals

applications



potable water



heating



cooling

segments



commercial building

approvals



BSI Kitemark



NSF



UK water regulation 4

assortment

item number	size	dimensions	weight	packaging	gtin
542007	Rc1/2"	60x30x40 mm	0.12 kg	box (20 pce)	05013866007866
542008	Rp3/4"	65x35x60 mm	0.22 kg	box (10 pce)	05013866007873

specifications - characteristics

color	brass
materials	brass (CW617N)
finishing	none
shape	straight (0°)
connection type	R - male thread gas conical (BSPT), hose connector
pressure rating (PN)	PN 20
sealing	EPDM

specifications - general


product group	valves (fill and drain valves)
ETIM class	EC010985 Drain valve (radiator and tap water)
HS code	84818019
brand	Pegler
series	Draincock
product type	833
UNSPS	40141654

specifications - technical

max operating pressure liquid	20 bar
min. medium temperature	30 °C
max medium temperature	120 °C

dimensions

item number	size	d1	DN1	l1	z1	slw1	l2	slw2	V	a
542007	Rc1/2"	21.0	1/2" (DN15)	17	3	21	40	25	13	55
542008	Rp3/4"	26.0	3/4" (DN20)	20	5	32	46	25	13	55

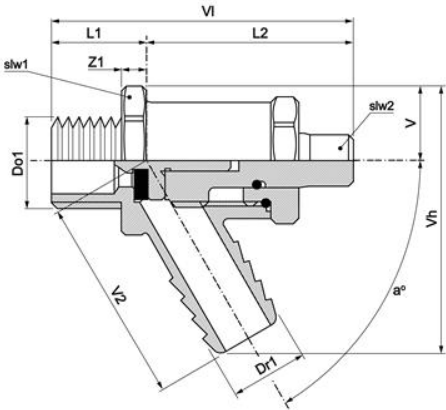

sustainability

item number	carbon footprint (A-C) embodied carbon	data source
542007	0.54kgCO2e	TM65
542008	1kgCO2e	TM65

downloads

- [833 - jpg](#)[Diagram - jpg](#)[Pegler Valve Installation Instructions - pdf](#)