

Markwik 21+ Panel Mounted Thermostatic Basin Mixer, Time Flow Sensor with Removeable Spout

ILLUSTRATED

A6684 (TB H6) Markwik 21+ panel mounted thermostatic basin mixer, time flow sensor, demountable with detachable spout

OPTIONS

A6899 Markwik 21+ purging kit for panel mounted thermostatic mixers

ILLUSTRATED PRODUCT DETAILS

Weights

A6684 3.60 KG

Finishes

A6684  Chrome (AA)

Materials


A6684 Chrome Plated Brass

Special Notes

TMV3 meets the requirements of the NHS Model Engineering Specification-D08 Valves.

Suitable for both high and low pressure (0.2 Bar to 5 Bar)

Mixer Tap is activated by hand movement over the sensor and water will run for a predetermined length of time. Factory pre-set at 1 minute but adjustable. Hygienic automatic flush can be set to occur every 6, 12, 24, 48 or 72 hours. Especially suited to medium and large hospital pattern integral back outlet basins and washing associated with clinical or nursing procedures. Fitted with an Armitage Bioguard outlet which reduces the opportunity for biofilm attachment and is lined with anti-microbial copper. Unique built-in thermal disinfection cleansing feature. Spout is removable for autoclave sterilisation. Body demounts for submergible disinfection. Flow rate regulated to maximum of 10 litres per minute. A separate purging kit is available to facilitate initial installation flushing and water sampling.

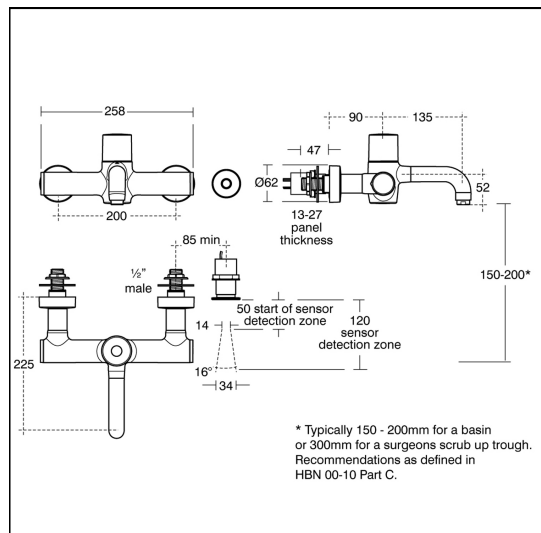

ACCREDITATIONS



FEATURES

