

Contour 21 Washbasin 50cm With Upright No TH No CH No O/F

ILLUSTRATED

- S2144** (LB H M) Contour 21 back outlet washbasin, 50cm with 150mm upstand splashback, no tapholes, no overflow, no chainstay hole
- A6711** (TB-H2A) Markwik 21 integral thermostat, demountable panel mixer, single sequential lever, detachable spout and Armitage Bioguard outlet fitted, short spout
- S8920** (TRR1/P) Trap 1½" plastic resealing bottle, 75mm seal, multi-purpose outlet
- S9112** Concealed hangers pressed Steel, toggle bolts and clips for Contour washbasins

OPTIONS

- S8746** Plastic strainer for back outlet washbasins
- A6252** (TB H6) 100mm short projection spout
- A6256** Filter Adaptor for Markwik 21 demountable mixer spout
- F960847** Nozzle Anti-Pseudomonas outlet for Markwik 21
- A4846** Sensorflow 21 compact 150mm panel mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing and filter, mains
- A4847** Sensorflow 21 compact tubular panel mounted 150mm projection spout, anti splash or anti vandal laminar flow outlet, integral sensor, copper tube inlets, link
- A4845** Sensorflow 21 compact tubular panel mounted 150mm projection spout, anti splash or anti vandal laminar flow outlet, integral sensor, copper tube inlets, battery
- A5900** TMV thermostatic mixing valve, 15mm
- SR021** Contour basin outlet adapter

ILLUSTRATED PRODUCT DETAILS

Sizes

S2144 w:500 x d:350

Weights

S2144 14.00 KG
A6711 4.00 KG
S8920 2.00 KG
S9112 0.47 KG

Materials

S2144 Vitreous China
A6711 Chrome Plated Brass
S8920 Plastic
S9112 Metal

Finishes

S2144  White (01)
A6711  Chrome (AA)
S8920  Neutral/No Finish (67)
S9112  Neutral/No Finish (67)

Capacity

S2144 7.8 litres

Flow rates

A6711 7.5 Litres per minute @ 3 bar pressure


Designer

Robin Leven, RDI

Standards

BS EN 31

Special Notes

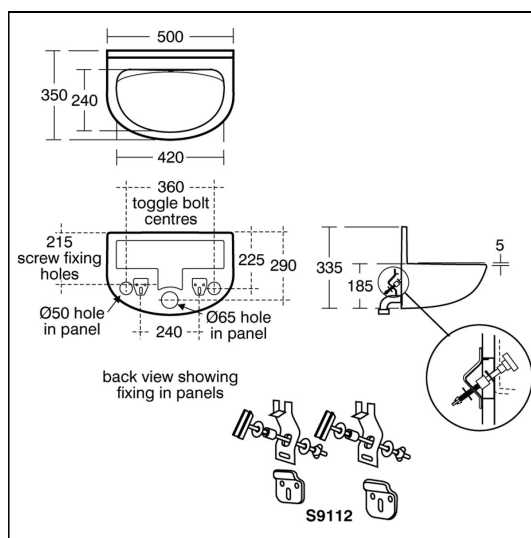

FEATURES



Contour 21 Washbasin 50cm With Upstand No TH No CH No O/F

Toggle bolts and outlet adaptor suitable for maximum panel thickness of 18mm. For use in connection with washing associated with clinical procedures. Suggested rim height 780-800mm. Washbasin wall mounted using S9112 hangers with additional toggle bolt and clips when panel mounted. Suitable for dedicated wall mounted taps will need to be positioned sufficiently above the upstand to a maximum of 200mm from base of outlet to lip of washbasin.