


SMART JOINT

SMART SERIES FLANGE ADAPTORS

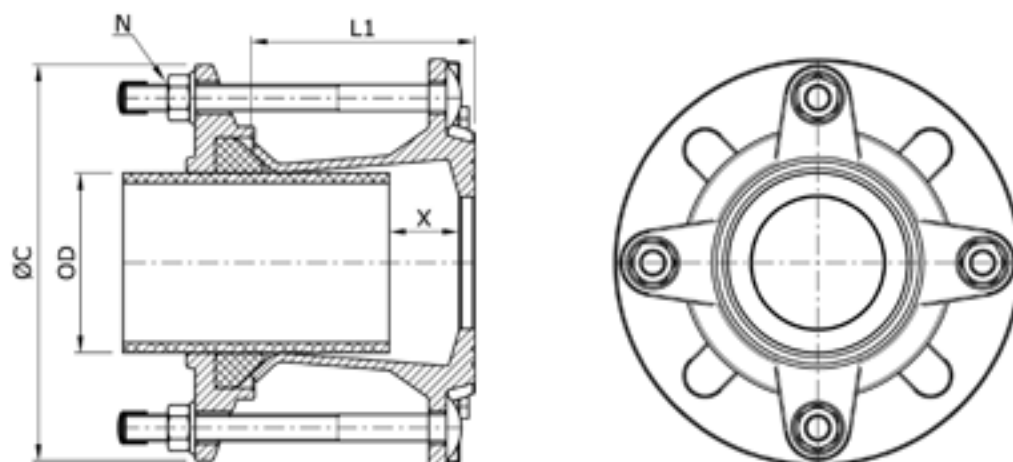

DN	ØD		L1	ØC	Bolts Quantity	Gap X		Type Of Flange	Weight
	Min.	Max.				Max	Min.		
50	58	74	100	170	4	70	40	a,b,c,d	3,9
50/65	68	84		183				a,b,c,d	4,5
80	84	105		210				a,b,c,d	5,2
100	99	118		223				a,b,c,d	5,9
	109	133		244				a,b,c,d	6,5
125/150	133	157	116	268	6	80	35	a,b,c,d	8,4
150	157	182	110	296				a,b,d	10
200	194	215	118	322			20	a,b,d	12
	218	242	120	354			35	a,b	14,4
250	242	268		403				a,b	17,4
	266	291		405				a,b	17,8
	280	305		424				a,b	21
300	302	327		443				a,b,d	23,7

The data concerning the min. and max. gap is calculated on the minimum outside diameter of the product's range

FOR FLANGED VERSION

- a. EN1092 PN10, PN16
- b. ANSI B16. CL125
- c. BS 10 TABLE D
- d. BS 10 TABLE E

NOTES

