


Wide range NSLSN10

Single bolt coupling

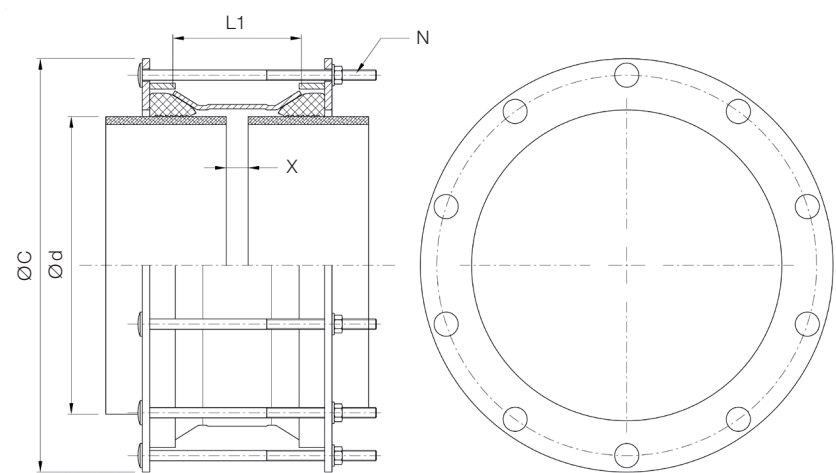

Designed and tailor-made on demand, suitable for pipes of any material. The full range starts with DN 300 up to DN 2000 and over.


Other sizes or ranges on request

DN	Ød		MOP (PN)	L1	Max. External Dimension ØC	Compression Bolts Quantity N	Gap X		Weight
	Min.	Max.					Max.	Min.	
300	320	350	6-10-16	176	500	8	50	20	46
350	340	370	6-10-16		520	10			48
	360	390	6-10-16		540				51
400	390	420	6-10-16		580				54
	410	440	6-10-16		600				56
450	435	465	6-10-16		620	12			59
	460	490	6-10-16		650				62
500	490	520	6-10-16		680				65
	510	540	6-10-16		700				67
	535	565	6-10-16		725	14			70
	560	590	6-10-16		750				73
600	590	620	6-10-16		780				76
	620	650	6-10-16		810				79
	645	675	6-10-16		835	16			82
	670	700	6-10-16		860				85
700	695	725	6-10-16		885				88
	720	750	6-10-16		910				90
	750	780	6-10-16		940	101			
	780	810	6-10-16		970	105			
800	805	835	6-10-16		995	18			108
	835	865	6-10-16		1025				112
	860	890	6-10-16		1050				115
	895	925	6-10-16		1085				119
900	925	955	6-10-16		1115	20			123
	955	985	6-10-16		1145				126
	985	1015	6-10-16		1175				174
	1000	1030	6-10-16		1190				178
1000	1030	1060	6-10-16	1220	22	182			
	1060	1090	6-10-16	1250		187			
	1080	1110	6-10-16	1270		190			
	1100	1130	6-10-16	1290		198			
1100	1130	1160	6-10-16	1320	24	199			
	1160	1190	6-10-16	1350		203			
	1185	1215	6-10-16	1375		207			
	1200	1235	6-10-16	1398		211			
1200	1235	1265	6-10-16	1428	26	216			
	1300	1330	6-10-16	1490		227			
	1335	1365	6-10-16	1525		232			
	1385	1415	6-10-16	1575		240			
1400	1410	1440	6-10-16	1600	28	245			
	1440	1470	6-10-16	1630		249			
	1510	1540	6-10-16	1700		32	336		
	1585	1615	6-10-16	1775		34	351		
1600	1610	1640	6-10-16	1800	30	357			
	1650	1680	6-10-16	1840		365			
	1825	1855	6-10-16	2035		34	404		
	1860	1890	6-10-16	2073			411		
1800	2020	2050	6-10-16	2230	38		491		
	2065	2095	6-10-16	2275			501		

The data concerning the min. and max. gap is calculated on the minimum outside diameter of the product's range
This chart is for indicative purposes. Nova Siria srl can vary the indicated standards (tolerance range, dimensions and materials) according to specifications requested by Customers or to designing needs.
Multisize series and wide range steel fittings provide the maximum hydraulic seal,
however they do not restrain axial pipes movement (for this type of products please refer to the MULTIGRIP section)

Wide range NSLSN10D

Double bolt coupling

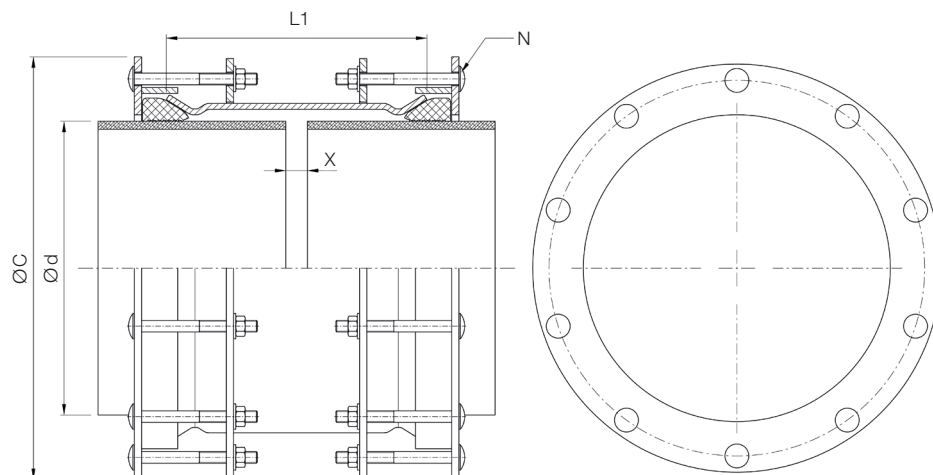

Other sizes or ranges on request

DN	Ø d		MOP (PN)	L1	Max. External Dimension Ø C	Compression Bolts	Gap X		Weight	
	Min.	Max.				Quantity N	Max.	Min.		
300	320	350	6-10-16	346	500	16	50	20	77	
350	340	370	6-10-16		520	20			83	
	360	390	6-10-16		540				86	
400	390	420	6-10-16		580				91	
	410	440	6-10-16		600				94	
450	435	465	6-10-16		620	24			101	
	460	490	6-10-16		650				105	
500	490	520	6-10-16		680				110	
	510	540	6-10-16		700				113	
	535	565	6-10-16		725	28			120	
	560	590	6-10-16		750				124	
600	590	620	6-10-16		780				32	129
	620	650	6-10-16		810					134
	645	675	6-10-16		835	138				
700	670	700	6-10-16		860	36				145
	695	725	6-10-16		885				149	
	720	750	6-10-16		910				153	
	750	780	6-10-16		940				173	
800	780	810	6-10-16		970	40			178	
	805	835	6-10-16		995				186	
	835	865	6-10-16		1025				44	191
	860	890	6-10-16		1050					196
900	895	925	6-10-16		1085	48				202
	925	955	6-10-16		1115					210
	955	985	6-10-16		1145				215	
1000	985	1015	6-10-16		1175				52	263
	1000	1030	6-10-16		1190	269				
	1030	1060	6-10-16		1220	275				
	1060	1090	6-10-16		1250	282				
1100	1080	1110	6-10-16		1270	56			286	
	1100	1130	6-10-16		1290				293	
	1130	1160	6-10-16		1320				300	
	1160	1190	6-10-16		1350				306	
1200	1185	1215	6-10-16		1375	60			335	
	1205	1235	6-10-16		1398				343	
	1235	1265	6-10-16		1428				350	
1300	1300	1330	6-10-16		1490				64	368
	1335	1365	6-10-16		1525	377				
1400	1385	1415	6-10-16		1575	68				389
	1410	1440	6-10-16		1600					397
	1440	1470	6-10-16		1630				404	
1500	1510	1540	6-10-16		1700				76	424
1600	1585	1615	6-10-16		1775	442				
	1610	1640	6-10-16		1800	450				
	1650	1680	6-10-16		1840	460				
1800	1825	1855	6-10-16		2035	92			473	
	1860	1890	6-10-16		2073				570	
2000	2020	2050	6-10-16		2230	92			664	
	2065	2095	6-10-16		2275				678	

The data concerning the min. and max. gap is calculated on the minimum outside diameter of the product's range

This chart is for indicative purposes. Nova Siria srl can vary the indicated standards (tolerance range, dimensions and materials) according to specifications requested by Customers or to designing needs. Multisize series and wide range steel fittings provide the maximum hydraulic seal,

however they do not restrain axial pipes movement (for this type of products please refer to the MULTIGRIP section)