


Wide range LSN40

Flange adaptor

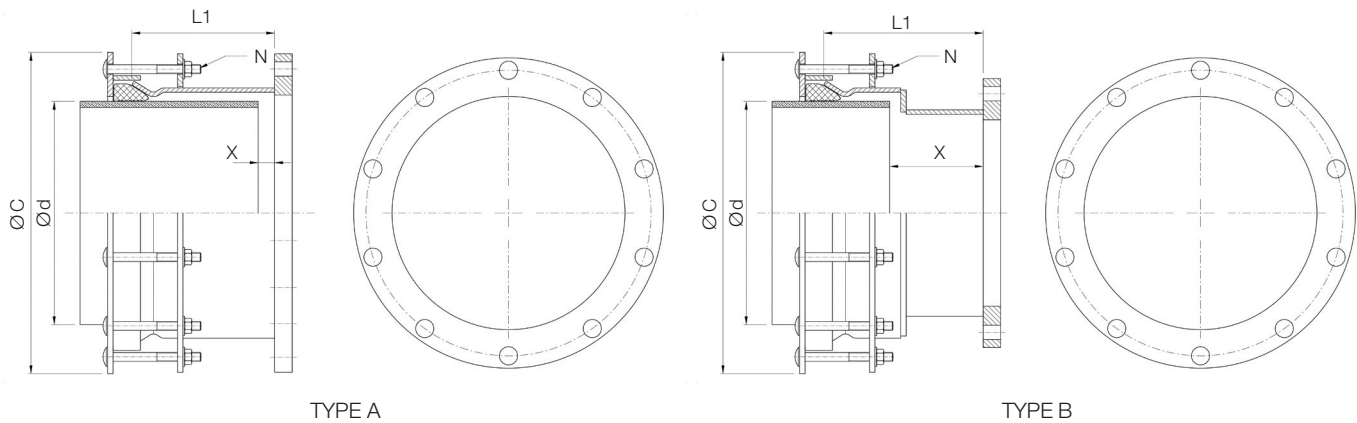

Other sizes or ranges on request

DN	Ø d		Flange DN	Flange PN	Type	L1	Max. External Dimension Ø C	Compression Bolts	Gap X		Weight					
	Min.	Max						Quantity N	Max.	Min.						
300	320	350	300	6-10-16	B	286	500	8	210	170	57					
350	340	370	350	6-10-16	A	256	520	10	180	25	74					
	360	390		6-10-16			540				76					
400	390	420	400	6-10-16			580				87					
	410	440		6-10-16			600				89					
450	435	465	450	6-10-16	A	256	620	12	180	25	104					
	460	490		6-10-16			650				106					
500	490	520	500	6-10-16			B				286	680	14	210	170	128
	510	540		6-10-16								700				130
	535	565		6-10-16	725	133										
	560	590		6-10-16	750	135										
600	590	620	600	6-10-16	A	256	780	14	180	25	174					
	620	650		6-10-16			810				177					
	645	675		6-10-16			B				286	835	210	170	179	
700	670	700	700	6-10-16	A	256	860	16	180	25	165					
	695	725		6-10-16			885				168					
	720	750		6-10-16			910				170					
	750	780		6-10-16	B	286	940		210	170	184					
800	780	810	800	6-10-16	A	256	970	18	180	25	211					
	805	835		6-10-16			995				215					
	835	865		6-10-16			1025				218					
	860	890		6-10-16	B	286	1050		210	170	221					
900	895	925	900	6-10-16	A	256	1085	20	180	25	241					
	925	955		6-10-16			1115				245					
	955	985		6-10-16	B	286	1145		210	170	248					
1000	985	1015	1000	6-10-16	A	256	1175	22	180	25	307					
	1000	1030		6-10-16			1190				310					
	1030	1060		6-10-16			1220				314					
	1060	1090		6-10-16	B	286	1250		210	170	318					
1200	1185	1215	1200	6-10-16	A	256	1375	24	180	25	415					
	1205	1235		6-10-16			1398	418								
	1235	1265		6-10-16			1428	26			423					
1400	1385	1415	1400	6-10-16			A	256			1575	28	180	25	489	
	1410	1440		6-10-16	1600	30			494							
	1440	1470		6-10-16	1630	30			498							
1600	1585	1615	1600	6-10-16	A	256			1775	34	180	25			617	
	1610	1640		6-10-16			1800	621								
	1650	1680		6-10-16			1840	627								
1800	1825	1855	1800	6-10-16			A	256	2035	38			180	25	680	
	1860	1890		6-10-16	2073	752										
2000	2020	2050	2000	6-10-16	A	256			2230	46	180	25			905	
	2065	2095		6-10-16					2275						914	

The data concerning the min. and max. gap is calculated on the minimum outside diameter of the product's range
This chart is for indicative purposes. Nova Siria srl can vary the indicated standards (tolerance range, dimensions and materials) according to specifications requested by Customers or to designing needs.
Multisize series and wide range steel fittings provide the maximum hydraulic seal, however they do not restrain axial pipes movement (for this type of products please refer to the MULTIGRIP section)