


KWC F5E-Therm
Electronic thermostatic wall-mounted mixer with battery operation

Modell-Linie: F5E | F5ET1101
Taps | Electronic taps

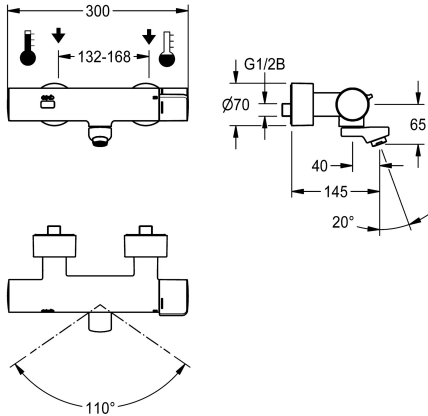

Article Number

3600004010
Projection 200 mm

3600004009
Projection 145 mm

3600004011
Projection 260 mm

NEW


F5E-Therm thermostatic mixer DN 15 for wall mounting with lockable swivelling outlet, for sanitary facilities. Opto-electronic control, activation on hand reflection. Thermostat with metal handle with adjustable, turn-proof temperature stop. With the option of manual thermal disinfection. For connection to hot and cold water. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, polished chromium-plated brass. Laminar jet controller with integrated

flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 145 mm projection. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. With facility for parameterisation and communication via optional bidirectional remote control or C-module unit with the necessary app.

Technical Data

C-module
with backflow preventer
compatible A3000 open
default automatic hygiene flus
default flow time
depressurised
with filter
adjustable flow time
functional principle
hygiene flushing
diameter nominal
inlet size
Locking mechanism
material fitting
maximum flow time
minimum flow pressure
minimum flow time
type of mixing
number of batteries

optional
yes
no
24h after the last activity
10 Seconds
no
yes
yes
electronic self-closing
yes
DN 15
G 1/2 B
Top section, non-ceramic
brass
255 Seconds
1 bar
1 Seconds
with thermostat
1



KWC F5E-Therm
Electronic thermostatic wall-mounted mixer with battery operation

Modell-Linie: F5E | F5ET1101
Taps | Electronic taps

Parameterization	remote control
Pop-up waste set	no
power supply connection	Battery 6 V
power consumption	1.5 Voltampere
Type of power supply	Battery
protective system IP	IP59K
with rosettes/cover plate	yes
protective shutdown	yes
sound insulation	no
Spout	rotating, bottom
spout projection	145 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	manual thermal disinfection
with transformer/power supply	no
type of batteries	CR-P2 Lithium battery 6V
type of mounting	wall mounting
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	bib tap
volume flow rate at 3 bar	0.1 l/s
water connection	S-connections
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



Bidirectional remote control for
electronical fittings F3 and F5

2030036654
ACEX9005




2-button remote control for fittings F3
and F5

2030036849
ACEX9004



Theft-proof housing for aerator

2000104778
ZTAPS0005



C-module unit for compatible KWC
electronic wall-mounted mixers

3600008377
ACET9003

Spare Parts

KWC F5E-Therm
Electronic thermostatic wall-mounted mixer with battery operation

Modell-Linie: F5E | F5ET1101
Taps | Electronic taps



F5 Foil

2030053034
ASET2010



Lithium battery 6 V

2000104846
EPRTR0008




Hexagonal socket wrench

2030047722
ACEX9011




Screw rosette

2030046777
ASXX9003




Cover

2030003258
EAQLT0002



Solenoid valve cartridge

2030045522
ACXX9002

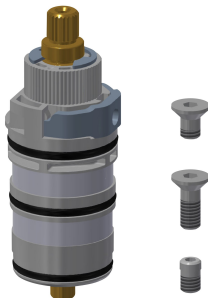

Thermocouple

2030003300
EAQLT0004




Laminar jet regulator

2030012352
ETAPS0037




Sensor with control electronics

3600009931
ASET1015



Swivel spout, 40 mm

2030035159
ASXX1003



Temperature stop

2030003296
EAQLT0003