


KWC F5E
Electronic pillar tap with in-wall power supply

Modell-Linie: F5E | F5EV1003
Taps | Electronic taps

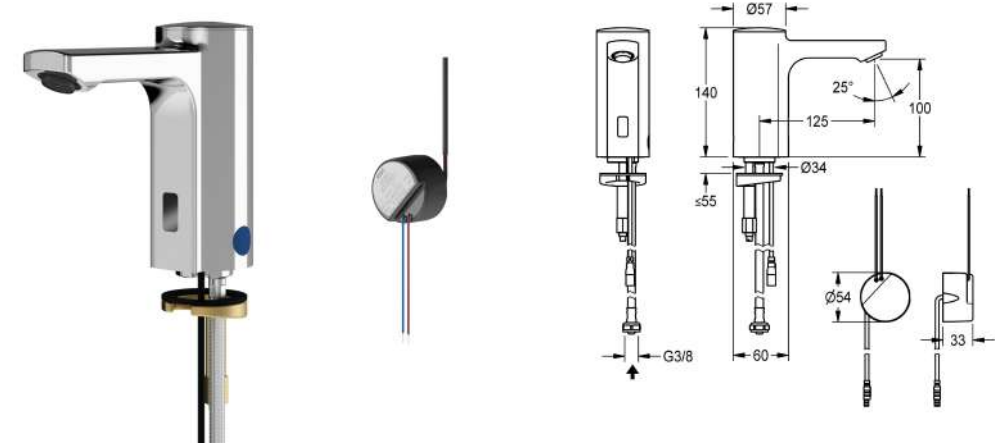

Article Number

2030035331

2030039437
with flow regulator 3.0 l/min

volume flow rate at 3 bar

0.08 l/s

0.05 l/s

F5E pillar tap DN 15 for sanitary facilities, opto-electronically controlled. For connection to pre-mixed hot or cold water via hose and strainer. Control electronics, solenoid valve cartridge and sensor in all-metal housing, high-polished chromium-plated brass. Anti-theft aerator, design SLIM, with integrated flow regulator 5.0

l/min. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control. With in-wall power supply 100 - 240 V AC.

Technical Data

with backflow preventer	no
calculation flow rate cold wat	0.1 l/s
compatible A3000 open	no
default automatic hygiene flus	24h after the last activity
depressurised	no
with filter	yes
functional principle	electronic self-closing
hygiene flushing	yes
diameter nominal	DN 15
inlet size	G 3/8
Locking mechanism	Top section, non-ceramic
material fitting	brass
minimum flow pressure	1 bar
type of mixing	no
Parameterization	remote control
Pop-up waste set	no
power supply connection	100 - 240 V AC
position of power connection	from bottom
power consumption	1.5 Voltampere
Type of power supply	Transformer
protective system IP	IP59K
with rosettes/cover plate	no



KWC F5E
Electronic pillar tap with in-wall power supply

Modell-Linie: F5E | F5EV1003
Taps | Electronic taps

protective shutdown	yes
sound insulation	no
Spout	fixed
spout projection	125 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	no
thermal disinfection	no
with transformer/power supply	yes
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.08 l/s
water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



Bidirectional remote control for
electronical fittings F3 and F5

2030036654
ACEX9005




2-button remote control for fittings F3
and F5

2030036849
ACEX9004



Socket

2030040334
ACEX1001



Anti-twist protection for F5S

2030035383
ACXX1001



Extension cable 5 m

2030043814



PURETHERM under-table thermostat

2030012758



5.0 l/min aerator, angle-adjustable

2030041326



3.0 l/min. aerator

2030041424



KWC F5E
Electronic pillar tap with in-wall power supply

Modell-Linie: F5E | F5EV1003
Taps | Electronic taps

ACEX9010



Aerator 1.8 l/min

2030041442
ACXX1005

PURE0031

ACXX1002

ASXX1008

Spare Parts



Sensor, ID 01/00004

2030041458
ASEX1005



Cap

2030041558
ASEX1007



Plug blue

2030041952
ASEX1010



Quick-action fastener

2030043596
ASEX1013



Plug red

2030041951
ASEX1009




In-wall power supply

2030039825
ACEX9003



Hose

2030041311
ASXX1005



Solenoid valve cartridge

2030045522
ACXX9002



KWC F5E
Electronic pillar tap with in-wall power supply

Modell-Linie: F5E | F5EV1003
Taps | Electronic taps



Water way

2030041949
ASEX1008



Mounting key

2030041329
ACXX1003



Aerator 5.0 l/min

2030041011
ASXX1004