
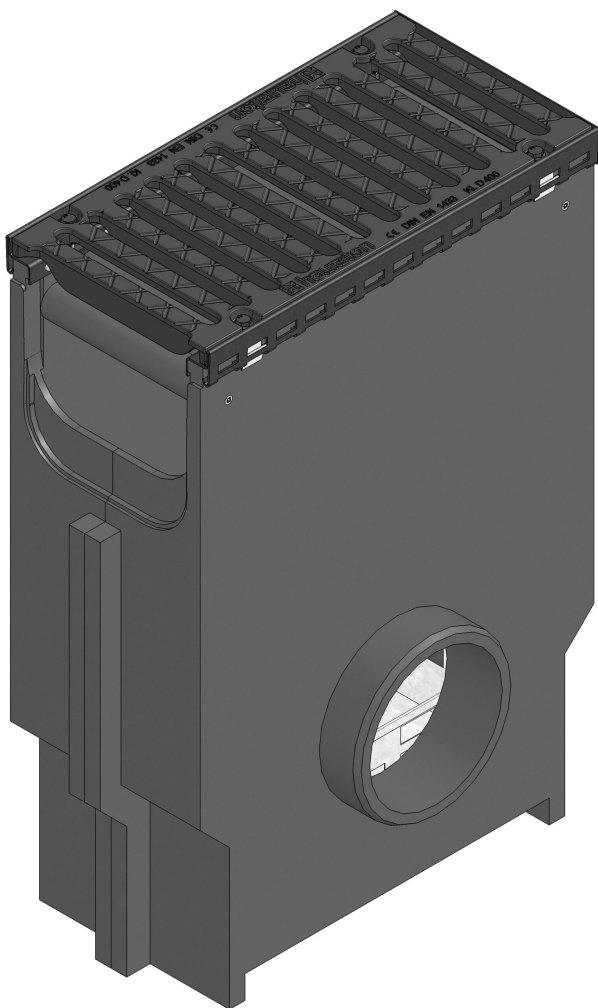


Article No.49554

Trash boxes

for NW 200, with silt bucket made of galvanised steel, with ductile iron grating, SW 100/18 mm, black, class D 400, 4-fold bolted, 0,5 m



Technical information and metrics

Article No.	49554
-------------	-------

Einlegetiefe	20 mm
--------------	-------

Weight	35.20 kg
--------	----------

Material	Ductile iron GJS 500-7, KTL coated steel, recycled polyolefin, Steel black galvanised
----------	--

Intake cross-section	936.0 cm ² /m
Nominal size	200
Material grating	Ductile iron GJS 500-7
Regulations	EN 1433, DIN 19580
Sales text	Sump unit with edge frames made of KTL-coated steel, with ductile iron grating SW 204/18 mm, black, cl. D 400, with silt bucket made of galvanised steel, RECYFIX NC 200, 0.5 m
Product description	RECYFIX NC 200 - Trash box made of modified PP, according to EN 1433, with integrated KTL-coated angle housing, with lateral two-sided preformed pipe connection element DN/OD 200, with removable silt bucket made of galvanised steel, suitable for both-sided connection of channel types RECYFIX NC 200, with ductile iron grating made of spheroidal ductile iron GJS 500-7, slot width 204/18 mm, black, loading capacity from A 15 - D 400 according to EN 1433, fourfold locking, L/W/H 500x262x752 mm, item no. 49554
Packaging unit	4