

Endex Male adapter



group: N8 **category:** fittings **product line:** Pegler Endex

The Endex N8 is a male adaptor with a end feed and male thread end. By using Endex in your piping installation you are using a simple and cost-effective method. Endex provides universal piping systems suitable for both domestic and light commercial applications.

- Compact neat joints
- Clear identification on fittings dimensions
- Suitable for a range of applications
- Provided with all relevant approvals

applications

potable water, natural gas,
heating, cooling, compressed air

segments

commercial building , industry

approvals

CSN , DVGW Wasser , KIWA ,
WRAS

assortment

item number	size	dimensions	weight	packaging	gtin
88330	15xR1/2"	16x20x38 mm	0.03 kg	bag (10 pce)	05022050057013
88331	22xR3/4"	22x26x41 mm	0.06 kg	bag (10 pce)	05022050057037
88332	28xR1"	28x33x47 mm	0.09 kg	bag (10 pce)	05022050057143
88333	35xR1 1/4"	35x41x54 mm	0.14 kg	bag (1 pce)	05022050883339

specifications - characteristics

color	brass
materials	brass (CW617N)
finishing	none
shape	straight
connection type	solder, R - male thread gas conical (BSPT)
sealing	Metal sealing

specifications - general

product group	fittings (dismountable)
ETIM class	EC003024 Fitting with 2 connections
HS code	74122000
brand	Pegler
series	Endex
product type	N8
UNSPS	40172500

specifications - technical

max operating pressure liquid	16 bar
min. medium temperature	-40 °C
max medium temperature	65 °C
peak medium temperature	110 °C


item number
size

88330
15xR1/2"

88331
22xR3/4"

88332
28xR1"

88333
35xR1 1/4"

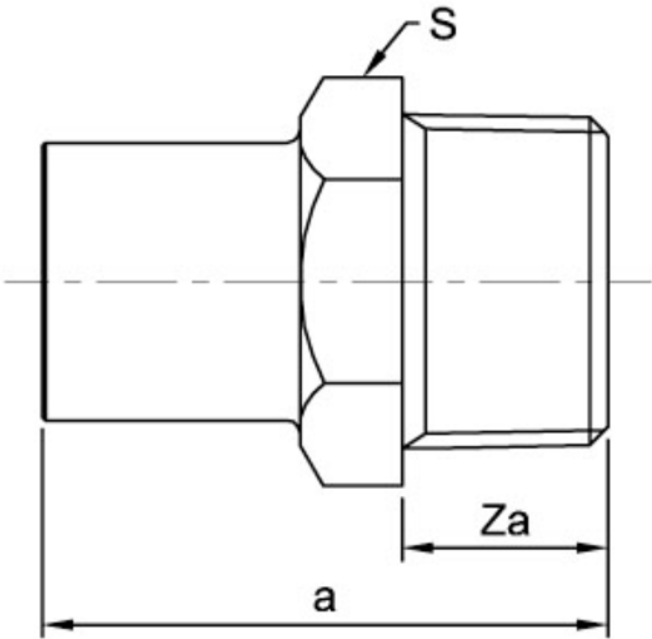

sustainability

item number	carbon footprint (A-C) embodied carbon	data source
88330	0.18kgCO2e	TM65
88331	0.31kgCO2e	TM65
88332	0.51kgCO2e	TM65
88333	0.77kgCO2e	TM65

downloads

-  N8 - jpg
-  Diagram - png