


KWC F5LME
Hybrid washbasin tap

Modell-Linie: F5L | F5LME005
Taps | Manual taps

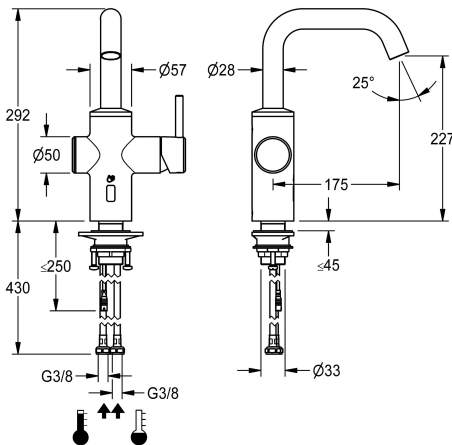

Article Number

3600008404


F5LME hybrid washbasin tap DN 15 as pillar mixer with swivelling spout, can be locked in the centre position. Adjustable swivel ranges of 50°, 120° and 360°. For connection to hot water and cold water via hoses with strainers. Single lever mixer with mixer cartridge with ceramic disc technology and adjustable, turn-proof temperature stop. Alternative activation using hand reflection via an opto-electronic sensor for time-controlled water release with preset mixing water temperature. Mixer cartridge, solenoid valve and sensor with control electronics in all-metal housing, brushed stainless steel. Laminar jet controller with integrated flow rate controller (8.0 l/min). Projection 220 mm. Activated water hygiene

flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. With option for parametrisation and communication via optional, bidirectional remote control. Optionally for battery operation with battery compartment including 6 V lithium battery (CR-P2) per fitting for installation under the kitchen sink or for separate power supply via 6.75 V/12 V DC power supply unit or AQUA 3000 open system accessories.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

Technical Data

depressurised	no
with filter	yes
functional principle	manual
hygiene flushing	prepared
diameter nominal	DN 15
Locking mechanism	Top section, non-ceramic
material fitting	stainless steel
minimum flow pressure	1 bar
type of mixing	yes
Pop-up waste set	no
with rosettes/cover plate	no
Spout	rotating, top
spout projection	175 mm
surface finish fitting	brushed
temperature limit	yes
thermal disinfection	yes
type of mounting	tap hole
type of operation	manual operation
type of tap	pillar tap
volume flow rate at 3 bar	0.13 l/s
water connection	hose (gland nut)




KWC F5LME
Hybrid washbasin tap

Modell-Linie: F5L | F5LME005
Taps | Manual taps

Accent colour


none

Mandatory Accessories



Power supply unit

2030039477
ACEX9001



Extension cable 5 m

2030043814
ACEX9010



In-wall power supply

2030039825
ACEX9003

Optional Accessories



2-button remote control for fittings F3 and F5

2030036849
ACEX9004



PURETHERM under-table thermostat


2030012758
PURE0031



Bidirectional remote control for electronical fittings F3 and F5

2030036654
ACEX9005

Spare Parts





KWC F5LME
Hybrid washbasin tap

Modell-Linie: F5L | F5LME005
Taps | Manual taps

Solenoid valve cartridge

2030045522
ACXX9002

Backflow preventer DN 6

2030045816
ASXX9002